


# HD/SD Multi-Format LCD Monitors

## LVM-173W-3G Hit!!



### Main body Dimensions

- Main Body : 427 x 310 x 90.5 (mm) / 16.81 x 12.20 x 3.56 (inch)
- with stand : 474.2 x 327 x 150 (mm) / 18.66 x 12.87 x 5.90 (inch)
- weight : 7.25kg / 15.95lbs

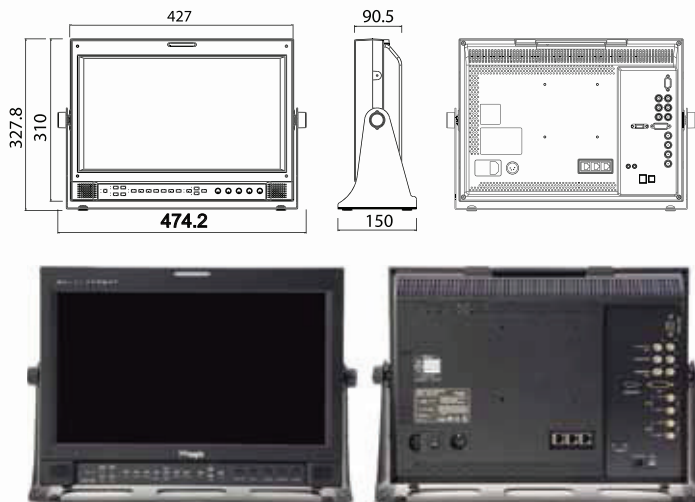


### Optional Accessories



### A Premium Monitoring Solution For The Most Demanding Applications.

The LVM-173W-3G is the higher end of TVLogic's two 17 inch monitoring solutions. This unit features a true 16:9 Aspect Ratio LCD panel with 12-bit video processing performance allowing for faithful reproduction of interlaced video and unparalleled scaling performance. Multi-Format and standard Dual-Link/3G support help to make this unit suitable for the most demanding applications.

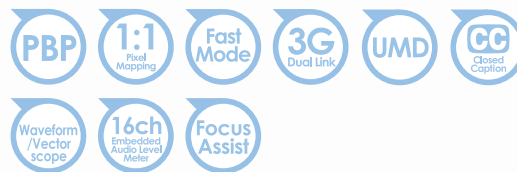

### Product Highlights

- 17" 1366 x 768 (16:9) Resolution
- Matte Finish Panel
- Supports TVLogic Color Calibration Utility for proper color alignment
- Firmware update by using Ethernet or USB
- GPI (RJ45)
- Waveform/Vectorscope (Y/Cb/Cr, RGB, Wide Type, Line Waveform)
- Range Error
- Marker
- User Aspect
- Blue Only / Mono
- X3 Zoom(PBP)
- Key lock
- Selectable 3 function keys
- H/V Delay
- Timecode Display
- UMD support (ANC, Manual, Dynamic and User)
- Closed Caption: CEA-608/708 (SDI), OP-47
- Monitor control by using RS422/Ethernet
- Focus Assist

### LCD

Size	17"
Resolution	1366 x 768 (16 : 9)
Pixel Pitch	0.273mm
Color Depth	16.7M (True 8bit)
Viewing Angle (Typ.)	178°(H) / 178°(V)
Luminance (Max.)	350cd/m <sup>2</sup> (center)
Contrast Ratio	900:1
Display Area	372(H) x 210(V) mm

### Input

1 x DVI-I	Analog & Digital RGB
1 x HDMI	HDMI Input
3 x BNC	Analog Video Input
2 x BNC	SDI A/B Channel Input

### Output

3 x BNC	Analog (Passive Loop Through)
2 x BNC	SDI A/B Channel Output (Active Loop Through)

### Input Signal

Analog	CVBS / S-Video / Component Video / RGB
3G-SDI	2.970Gbps
HD-SDI	1.485Gbps
SD-SDI	270Mbps
HDMI	480i/480p/720p/1080i/640x480/720x400/800x600/1024x768/1280x1024/1366x768
DVI-Analog	640x480/720x400/800x600/1024x768/1280x1024/1366x768
DVI-Digital(Graphic)	640x480/720x400/800x600/1024x768/1280x1024/1366x768

### Analog Input Spec

CVBS	1.0Vpp (With Sync)
S-Video	1.0Vpp (Y With Sync), 0.286Vpp (C)
Component Video	1.0Vpp (Y With Sync), 0.7Vpp (Pb,Pr)
RGB	1.0Vpp (G With Sync), 0.7Vpp (B,R)

### SDI Input Signal Formats

SMPTE-425M-A/B	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF) / 1080i (60/59.94/50)
SMPTE-372M (Dual Link)	Dual HD-SDI YPbPr(4:2:2) 1080p (60/59.94/50) Dual HD-SDI 1080i (60/59.94/50) YPbPr/RGB(4:4:4) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-274M	1080i (60 / 59.94 / 50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)
Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) / Internal Speaker (Stereo)
Power	DC 12/24V (1.8A) / AC 100~240V (50~60Hz)
Power Consumption (Approx.)	60Watts (MAX)
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / NDF Screw

\* Specifications may be changed without notice.